

Eagle 2 F3x (F3G)

Onboard air-data measuring system for F3G category.



Manual version: 1.0

RC Electronics
support@rc-electronics.eu; www.rc-electronics.eu

Contents

Introduction	3
Key features of the Eagle 2 F3x	3
Specifications	3
Physical overview	4
Power sensor for Eagle 2 F3x	4
Using the Eagle 2 F3x module	5
Powering the module	5
Mounting the module	5
Connecting module to Android RC electronics app	6
Unit settings:.....	7
Unit logbook:.....	7
Firmware update.....	8
Revision history.....	9

Introduction

The “Eagle 2 F3x” is one component of RC Electronics model aircraft telemetry system. The unit is the “on-board” unit intended to be used with the “Snipe / SnipeBLE” “ground station” in F3G category. The unit is designed to measure many parameters of an R/C model aircraft and transmit them to the ground station via the telemetry link working on 433 MHz frequency. The unit is capable of measuring altitude, acceleration of the plane in all axes, noise level, servo pulse on servo input, GPS data with 18Hz refresh rate and supply voltage. For storage it has internal fast solid-state storage which will record up to 20h of flying.

Key features of the Eagle 2 F3x

- Integrated fast solid-state memory for up to 20h of logging
- Latest MEMS sensors in use
- F3G FAI approved device
- 3 axes accelerometer
- **EnI** - Environment noise level detection to detect working electric, impeller or jet motor.
- **FHSS** - Frequency Hopping Spread System on 433MHz telemetry channel to eliminate frequency conflicts.
- 18 Hz GPS working with GNSS, Glonass and prepared for Galileo global positioning satellites.


Specifications

Unit Dimensions	54 mm x 17 mm x 9 mm
Weight	15 grams
Temperature Range ¹	-10°C ~ +60°C
Input Voltage Range	4.0 – 12.0 volts DC
Input Current	40 milliamps @ 5V DC
Measured Voltage	4.0 – 12.0 volts DC
Memory capacity	Up to 20h of flying

¹ Specifications are taken from component ratings and system limits and may not have been tested to the full extent of the specified ranges.



Physical overview

Pictures bellow is showing the Eagle 2 F3x (F3G version) unit. It has built in GPS antenna, one 4-pin connector to connect power sensor and a multi-color LED to show the status of the unit. The JR male connector is used to connect it to the radio-controlled aircraft's onboard receiver, which powers the module and detects servo pulse. The JR female connector serves as a servo pass-through as output for the F5G motor time / Wmin switch function (connect it to ESC). It also has built in BLE transmitter with antenna for communication with mobile application.

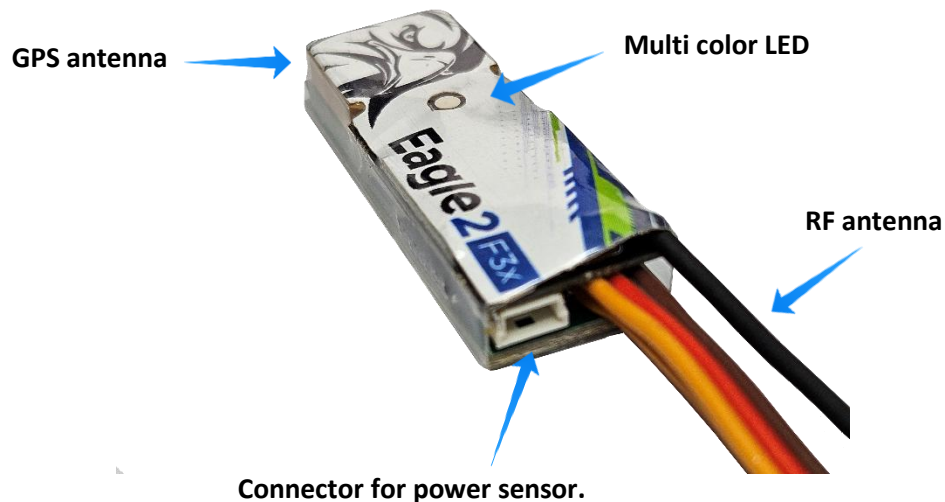

Power sensor for Eagle 2 F3x

Power sensor supports 2-12S Lipo cell and max 100A of current. Connect wires as shown bellow.

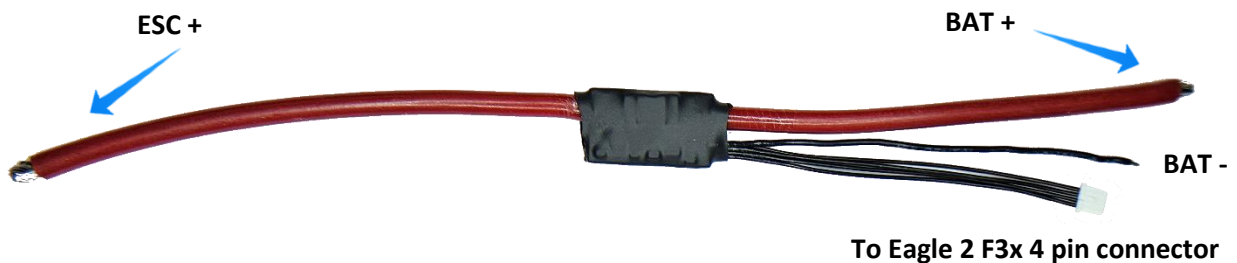

Power sensor has also 2 pin input for a restart switch. Once a restart switch is pressed / used, user can make a restart with Eagle 2 F3x without the need to make a power restart to reset motor timer / Wmin on Eagle 2 F3x.

Using the Eagle 2 F3x module

Powering the module

To power the module ON, plug the 3-pin male connector cable into the throttle channel on the R/C aircraft receiver and then plug the ESC/servo into module's servo pass-through female connector.

During operation LED will flash different status is:

Red flashing – module is waiting for GPS signal

green flashing – module is ready for flight, GPS reception is good

blue flashing – onboard logger is running – in flight mode

Mounting the module

The module can be mounted using double-sided tape, cable ties or Velcro. Velcro is recommended, so that the module can be easily removed.

Mount it under no carbon surface as it has built in GPS antenna. If there is any carbon or metal part above it, GPS reception will be compromised.


Be sure that the module is not touching any metal surfaces. Although unlikely, there is a possibility of shorting the metal contacts on the module, which could result in a radio system failure.

Be sure to keep the module away from water, fuel and other liquids. Always range check and test the aircraft's radio systems before flying with the Eagle 2 F3x module installed, to verify that all connections have been made correctly and there is no system interference.

Connecting module to Android RC electronics app

Connect the module to any Android / iOS mobile device where RC electronics app was installed from Google Play / Apple store. Unit connects automatically when powered on and app is running! There is no BT pairing needed!

Run RC electronics App and power on Eagle 2 F3x unit. How to set up Application, please refer to the application manual!

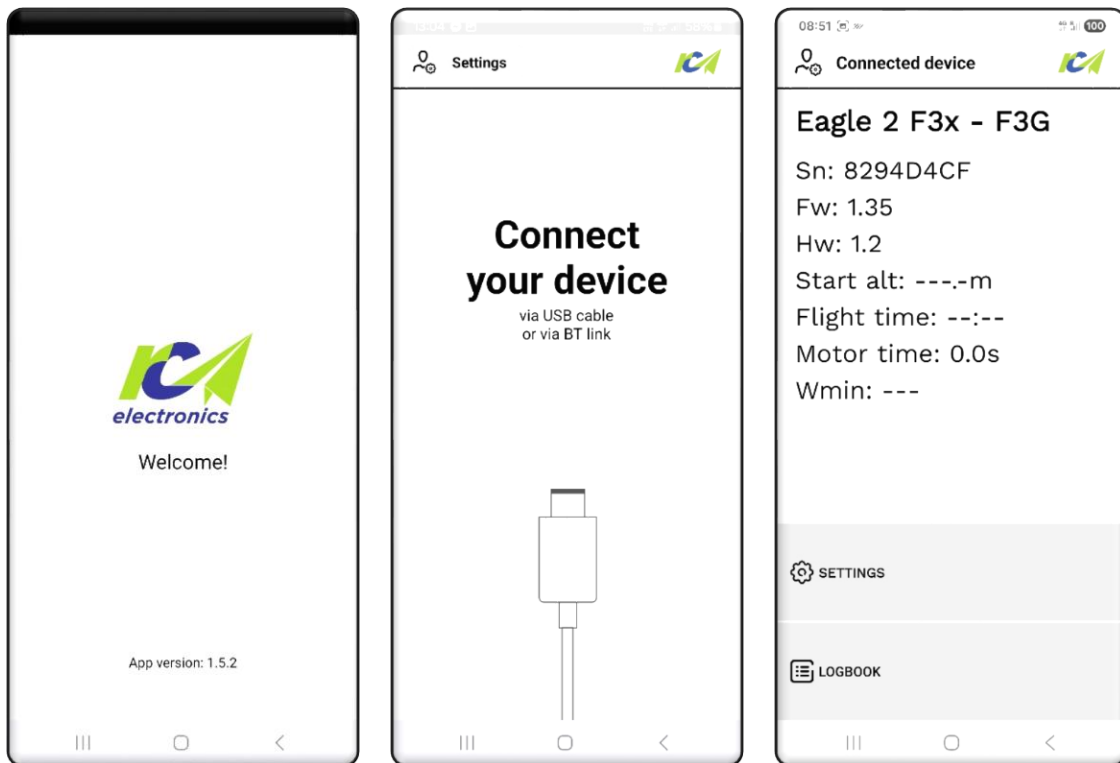

You will be able to see basic info, set the settings and download the IGC flight from device when connected.

Unit settings:


Telemetry pair key:

Enter your ground unit serial nr to pair it for valid RF link.

Motor restart:

Ignore it, it is for F3G type of Eagle 2 F3x

Settings are set only after “SAVE SETTINGS” button is pressed. If user uses back function, new settings are ignored!

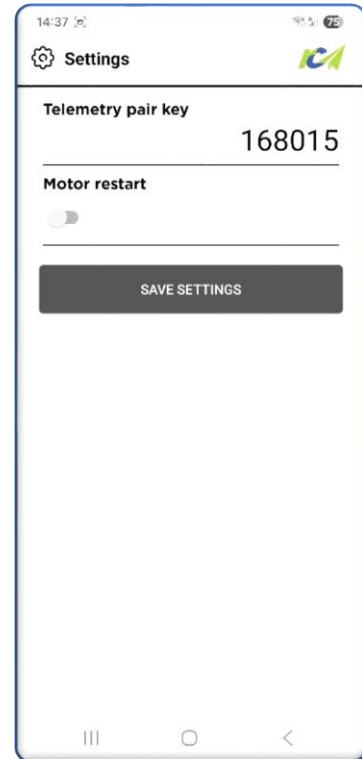


Unit logbook:

Select flight from dropdown list and press “DOWNLAOD FLIGHT” button. After flight is downloaded, user will be asked if he wishes it to upload it to his www.rcmodelspot.com account.

Before upload user must set his www.rcmodelspot.com login data into RC electronics application settings



Pressing “CLEAR LOGBOOK” button, will clear the log files from internal memory

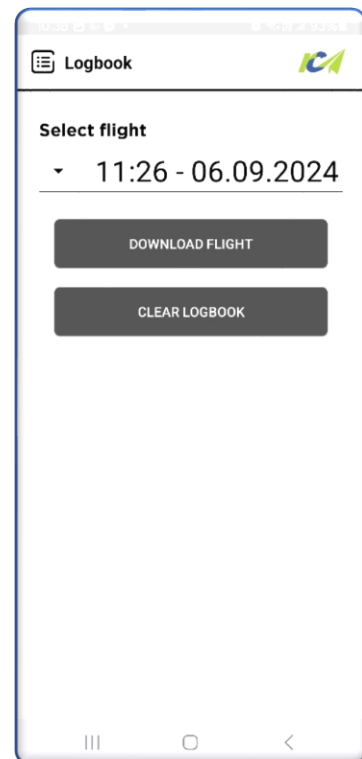

Firmware update

RC electronics app needs internet access to check if there is newer version available on server (Wi-Fi or mobile data). If the app finds newer version it will offer “UPDATE TO NEW VERSION” button to the user once he connects device to the app.

Once user presses “UPDATE TO NEW VERSION” button, app will perform update and after update is done, unit needs up to 15s to finishes update so do not disconnect power once update is finished, just wait that app shows device data again on the screen.

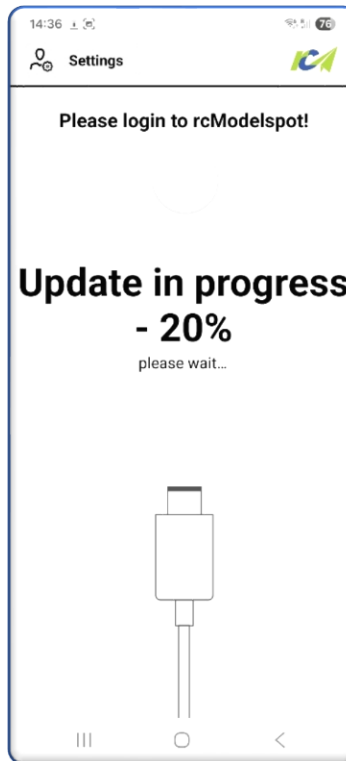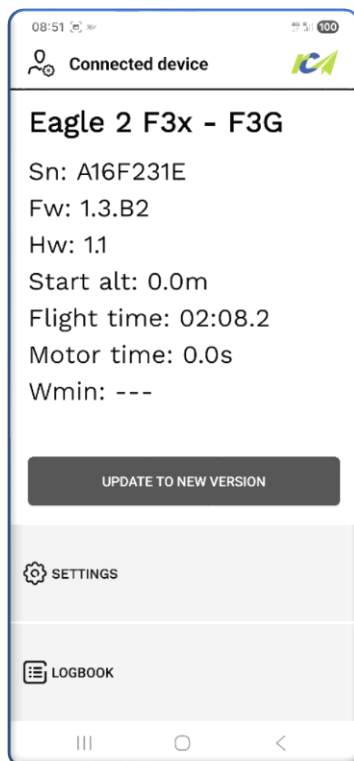

Revision history

18.03.2026	v1.0	- initial version
------------	------	-------------------